

LA-P Series Constant Current LED Driver IP67 PFC (CE) (UL)




Features

- ◆ Constant current mode
- ◆ Installation: Independent
- ◆ Protections: Short circuit / Over current
- ◆ Built-in active PFC function, PFC>0.9 at full loading
- ◆ Universal AC input / Full range
- ◆ Fully encapsulated with IP67 level

Compliance

- ◆ Magnetic Emission EN55015
- ◆ Harmonic EN61000-3-2
- ◆ Immunity EN61547
- ◆ Safety EN61347-1, EN61347-2-13

Wire diagram

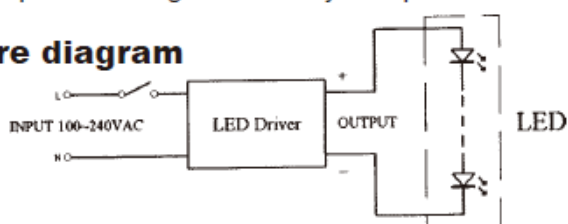

MODEL	INPUT	OUTPUT	RATED LOADING	PFC	EFFICIENCY	DIMENSION (L*W*H)
LA9P-350	100-240Vac	15-30Vdc 350mA	4---8 LED	>90%	78%	130*25*21mm
LA9P-700	100-240Vac	8-15Vdc 700mA	3---4 LED	>90%	75%	130*25*21mm
LA20P-350	100-240Vac	24-48Vdc 350mA	8---13 LED	>90%	82%	140*32*25mm
LA20P-700	100-240Vac	14-28Vdc 700mA	5---8 LED	>90%	82%	140*32*25mm
LA35P-350	100-240Vac	40-80Vdc 350mA	12---22 LED	>90%	87%	148*32*28mm
LA35P-700	100-240Vac	24-48Vdc 700mA	8---13 LED	>90%	85%	148*32*28mm
LA35P-1050	100-240Vac	16-32Vdc 1050mA	5---18 LED	>90%	87%	148*32*28mm
LA35P-1400	100-240Vac	12-24Vdc 1400mA	4---6 LED	>90%	85%	148*32*28mm
LA50P-700	100-240Vac	36-72Vdc 700mA	11---20 LED	>90%	87%	148*40*34mm
LA50P-1050	100-240Vac	24-48Vdc 1050mA	8---13 LED	>90%	87%	148*40*34mm
LA50P-1400	100-240Vac	18-36Vdc 1400mA	6---10 LED	>90%	87%	148*40*34mm
LA60P-700	100-240Vac	40-80Vdc 700mA	12---22 LED	>90%	88%	162*42.5*32mm
LA60P-1050	100-240Vac	30-60Vdc 1050mA	9---16 LED	>90%	88%	162*42.5*32mm
LA60P-1400	100-240Vac	20-42Vdc 1400mA	6---12 LED	>90%	88%	162*42.5*32mm
LA60P-1750	100-240Vac	18-36Vdc 1750mA	6---10 LED	>90%	88%	162*42.5*32mm
LA60P-2100	100-240Vac	15-30Vdc 2100mA	5---8 LED	>90%	88%	162*42.5*32mm