


CBR SERIES

2W-3W REGULATED



FEATURES

- DUAL IN LINE PACKAGE
- UP TO 3W REGULATED OUTPUT POWER
- 100% BURNED IN
- HIGH EFFICIENCY
- LOW NOISE
- NO EXTERNAL COMPONENTS REQUIRED
- 3000VDC ISOLATION
- LOW COST
- UL 94V-0 PACKAGE MATERIAL
- CUSTOM SOLUTIONS AVAILABLE

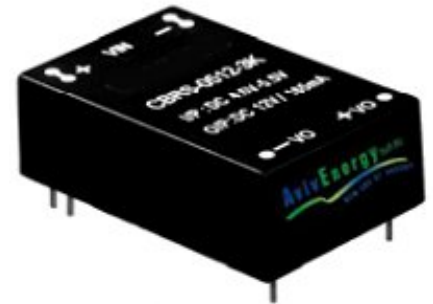

OUTPUT SPECIFICATIONS		INPUT SPECIFICATIONS	
Voltage Setpoint Accuracy	+/-3% max	Input Voltage Range	+/-10% max
Temperature Coefficient	+/-0.05%/°C	Input Filter	Pi Network
Ripple & Noise(20MHz BW) ¹	100mVp-p max	Protection	Fuse Recommended
Line Regulation ²	+/-1% max	GENERAL SPECIFICATIONS	
Load Regulation ³	+/-1% max	Efficiency	60% min
Minimum Load	10% of Full Load	Isolation Voltage ⁴	3000 VDC min
Short Circuit Protection	Current Limit Protection	Isolation Resistance	10 ⁹ ohms min
Short Circuit Restart	Automatic	Isolation Capacitance	80pF max
Transient Response ⁵	200uS max	Switching Frequency	50KHz min
ENVIRONMENTAL SPECIFICATIONS		MTBF ⁶	>850,000 Hours
Operating Temperature	-25°C to +71°C	Weight	12.0g-14.4g
Storage Temperature	-55°C to +125°C	Case Material	Non-Conductive Plastic
Humidity	95% max	Case Size	31.8mm*20.3mm*10.2mm
Cooling	Free-Air Convection	Conducted Emissions	EN55022 Class A
		Radiated Emissions	EN55022 Class A

ALL SPECIFICATIONS TYPICAL AT NOMINAL LINE, FULL LOAD, AND 25°C UNLESS OTHERWISE NOTED.

¹ Measured with 1uF ceramic capacitor connect to the output pins.

² High Line to Low Line.

³ Load Regulation is for output load current change from 10% to 100%.

⁴ For 10 seconds.

⁵ 25% Step Load Change.

⁶ MIL-HDBK-217F @25°C, Ground Benign.

● **SELECTION GUIDE**
2W-3W OUTPUT


MODEL NUMBER	INPUT VOLTAGE (VDC)	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (mA)	INPUT ⁷ CURRENT(mA)		EFF (%) ⁸	ISOLATION (VDC)
				FULL LOAD	NO LOAD		
CBRS-0505-3K	4.5-5.5	5	400	645	80	62	3000
CBRS-0512-3K	4.5-5.5	12	165	634	80	63	3000
CBRS-0515-3K	4.5-5.5	15	133	634	80	63	3000
CBRD-0512-3K	4.5-5.5	+/-12	+/-83	634	80	63	3000
CBRD-0515-3K	4.5-5.5	+/-15	+/-66	634	80	61	3000
CBRS-1205-3K	10.8-13.2	5	400	264	40	63	3000
CBRS-1212-3K	10.8-13.2	12	165	256	40	65	3000
CBRS-1215-3K	10.8-13.2	15	200	378	45	66	3000
CBRD-1212-3K	10.8-13.2	+/-12	+/-83	256	40	65	3000
CBRD-1215-3K	10.8-13.2	+/-15	+/-100	378	45	66	3000
CBRS-2405-3K	21.6-26.4	5	400	132	20	63	3000
CBRS-2412-3K	21.6-26.4	12	165	128	20	65	3000
CBRS-2415-3K	21.6-26.4	15	200	192	25	65	3000
CBRD-2412-3K	21.6-26.4	+/-12	+/-83	128	20	65	3000
CBRD-2415-3K	21.6-26.4	+/-15	+/-100	192	25	65	3000
CBRS-4805-3K	43.2-52.8	5	400	66	10	63	3000
CBRS-4812-3K	43.2-52.8	12	165	65	10	64	3000
CBRS-4815-3K	43.2-52.8	15	200	97	12	64	3000
CBRD-4812-3K	43.2-52.8	+/-12	+/-83	65	10	64	3000
CBRD-4815-3K	43.2-52.8	+/-15	+/-100	97	12	64	3000

Note: Other input to output voltages may be available. Please contact factory.


⁷ NOMINAL INPUT VOLTAGE.

⁸ NOMINAL INPUT VOLTAGE, FULL LOAD.


SIMPLIFIED SCHEMATIC

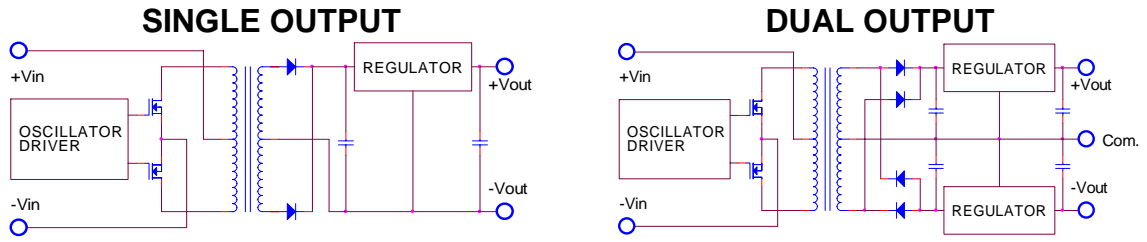

MECHANICAL DIMENSIONS & RECOMMENDED FOOTPRINT DETAILS

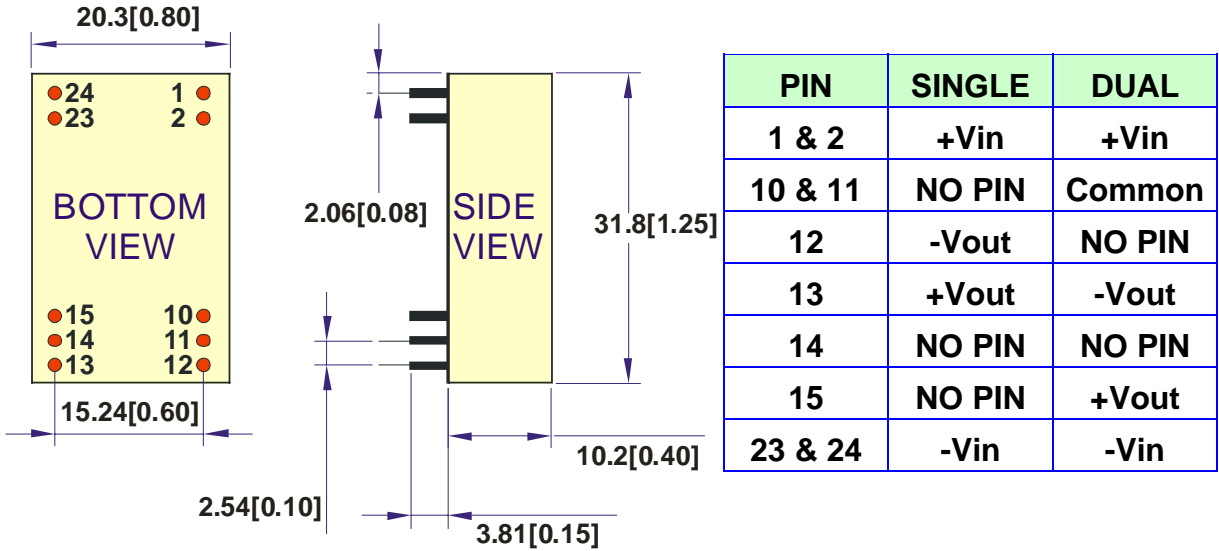


All dimensions are in mm[inches]

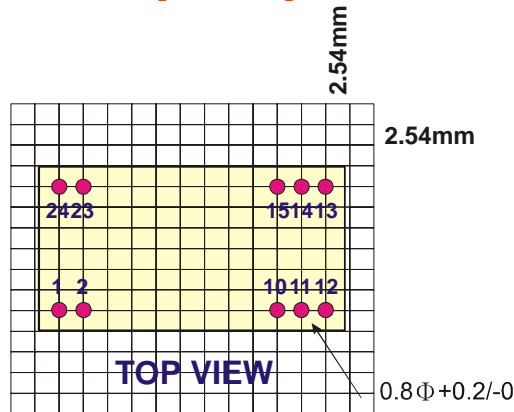


TYPICAL APPLICATIONS

SINGLE OUTPUT

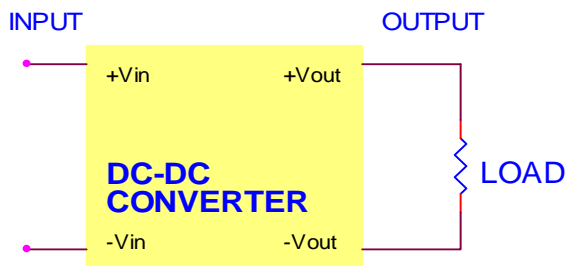


DUAL OUTPUT

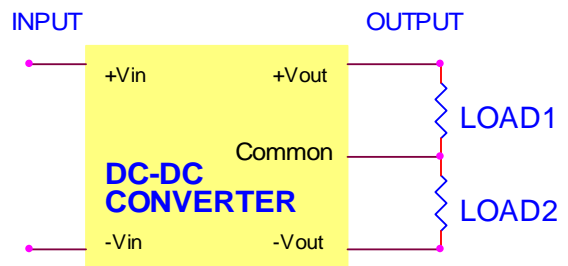


● TYPICAL PERFORMANCE CURVES

Specifications typical at TA=25 °C, nominal input voltage , rated output current unless otherwise specified.


OUTPUT LOAD VS EFFICIENCY

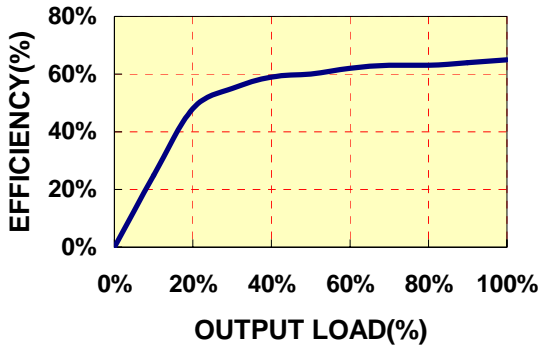


OUTPUT LOAD VS OUTPUT VOLTAGE

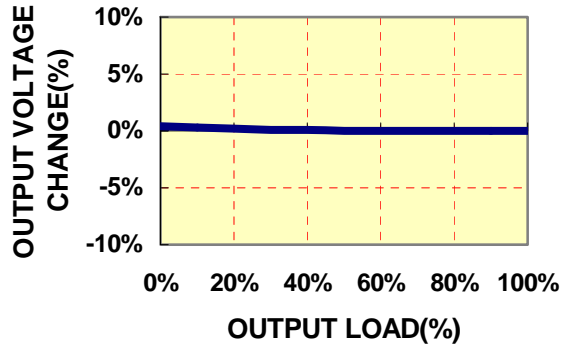

TEMPERATURE DERATING

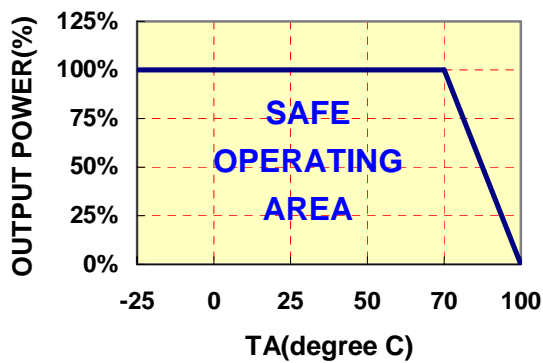

INPUT VOLTAGE VS EFFICIENCY

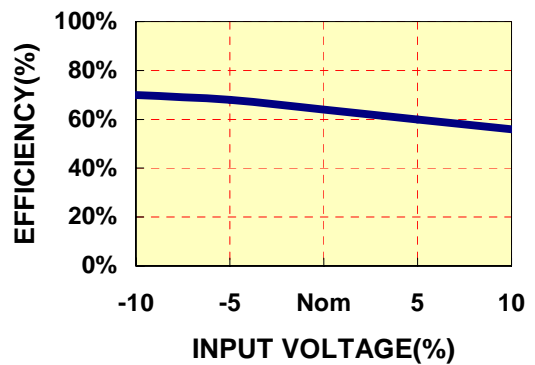

● INPUT FUSE SELECTION GUIDE

4.5-5.5V	10.8-13.2V	21.6-26.4V	43.2-52.8V
INPUT VOLTAGE(VDC)	INPUT VOLTAGE(VDC)	INPUT VOLTAGE(VDC)	INPUT VOLTAGE(VDC)
1000mA Slow-Blow Type	600mA Slow-Blow Type	300mA Slow-Blow Type	200mA Slow-Blow Type

Note: Certain applications may require the installation of external fuse in front of the input.

CBR SERIES APPLICATION NOTES:

EXTERNAL CAPACITANCE REQUIREMENTS:

No external capacitance is required for operation of the CBR series.

To meet the reflected ripple requirements of the converter, an input impedance of less than 0.5 ohm from DC to 100KHz is required.

External output capacitance is not required for operation, however it is recommended that 10uF tantalum and 0.1uF ceramic capacitance be selected for reduced system noise.

Additional output capacitance may be added for increased filtering, but should not exceed 220uF.

We Can Offer EMC-Filter According To EN55011/22 Class B.

Negative Outputs:

A negative output voltage may be obtained by connecting the +OUT to circuit ground and connecting -OUT as the negative output.