

Model: LV\*\*\*\*-03 Series

Approvals : **CE**

1~10 Watts single output

Features:

Size 86\*45\*26 mm (L\*W\*H)


- \* For High Brightness Light-Emitting Diode products.
- \* Universal AC input 90-264Vac.
- \* Fully isolated plastic case.
- \* Built-in Constant Current limiting design.
- \* Operation from -10°C~40°C full load.
- \* Protections: OVP / OLP/ SCP .
- \* Class II power design without earth pin.
- \* 1 year warranty.



Specifications:

Model No.		GP-LV2512-03	GP-LV5012-03	GP-LV8312-03	GP-LV1224-03	GP-LV2524-03	GP-LV4124-03	
Output	LED Operation Voltage <small>Note. 2</small>	12V Dc	12V Dc	12V Dc	24V Dc	24V Dc	24V Dc	
	Rated Current Range	250mA	500mA	830mA	120mA	250mA	410mA	
	Rated Max. Power	3W	6W	10W	3W	6W	10W	
	Efficiency (Typ.) 230Vac	75%	75%	75%	75%	75%	75%	
	Rise Time	<250ms at full load						
Input	Voltage Range	90 Vac ~ 264 Vac						
	Frequency Range	47 Hz ~ 63 Hz						
	AC Current	0.2A@115VAC / 0.1A@230VAC						
	Inrush Current	No components will be stressed over its max specification according to I2T						
	Leakage Current	<0.25mA / 240 Vac						
Protections	Over Load	100-135% rated output power recovers automatically after fault condition has been removed.						
	Short Circuit	Type: Hiccup mode, Recovers automatically after fault condition is removed.						
	Over Voltage	105-120% rated output Voltage						
Environment	Operation Temp.	-10°C~40°C full load .						
	Operation Humidity	20% ~ 95% RH non-condensing.						
	Storage Temp.	-20 ~ +80°C						
	Storage Humidity	10% ~ 95% RH						
Safety & EMC	Vibration	10 ~ 500 Hz, 2G 10 min. / 1 cycle, period for 60 min. each along X, Y, Z axes.						
	Safety Standards	meet EN61347-1, EN61347-2-13 ,						
	Withstand Voltage	meet I/P - O/P: 3.75K VAC						
	Isolation Resistance	meet >100M ohms / 500VDC at 25 °C.						
	EMI Conduction & Radiation	meet EN55015						
Others	Harmonic Current	Compliance to EN61000-3-2 Class C, EN61000-3-3						
	EMS Immunity	meet EN61547, EN61000-4-2, 3, 4, 5, 6, 8, 11						
	MTBF	400K hours min. MIL-HDBK-217F(25°C)						
	Dimension(L*W*H)	86*45*26 mm (L*W*H)						
Remark	Packing(L*W*H)/Carton	40*27*24cm:100PCS/Carton						
	Weight	90g						
	1. All parameters NOT specially mentioned are measured at 230Vac input, rated load and 25 °C ambient temperature. 2. Constant current operation region is within the specified output voltage range above. This is the suitable operation region for LED related applications. 3. The power supply is considered a component which will be installed a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.							

Dimension: Output connector with screw type.

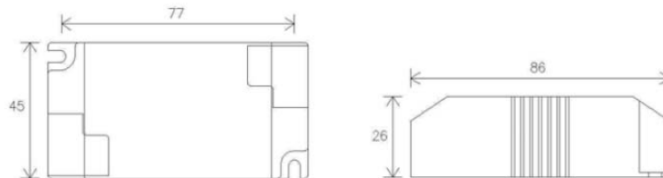

Configuration arrays when using with 3Ø&5Ø LED

