

## LA-PE Series Constant Current LED Driver PFC CE




### Features

- ◆ Constant current mode
- ◆ Built-in active PFC function, PFC>0.9 at full loading
- ◆ Installation: Independent
- ◆ Universal AC input / Full range
- ◆ Protections: Short circuit / Over current

### Compliance

- ◆ Magnetic Emission EN55015
- ◆ Harmonic EN61000-3-2
- ◆ Immunity EN61547
- ◆ Safety EN61347-1, EN61347-2-13

### Wire diagram

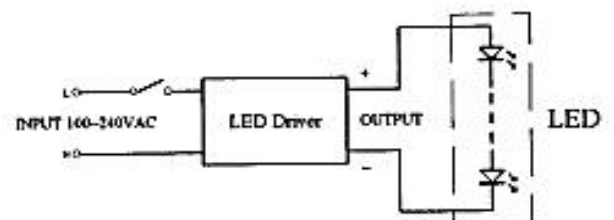

MODEL	INPUT	OUTPUT	RATED LOADING	PFC	EFFICIENCY (at full load)	DIMENSION (L*W*H)
LA6PE-350	100-240Vac	3-24Vdc 350mA	1-6 LED	>80%	76%	89*39*23mm
LA6PE-700	100-240Vac	2-12Vdc 700mA	1-3 LED	>80%	70%	89*39*23mm
LA12PE-350	100-240Vac	16-36Vdc 350mA	5-10 LED	>80%	82%	114*45*28mm
LA12PE-700	100-240Vac	8-18Vdc 700mA	3-5 LED	>80%	80%	114*45*28mm
LA20PE-350	100-240Vac	35-70Vdc 350mA	9-18 LED	>85%	85%	140*45*28mm
LA20PE-700	100-240Vac	15-35Vdc 700mA	4-9 LED	>85%	82%	140*45*28mm