


■ Features:

- ✓ Universal AC input/ Full range
- ✓ Built-in active PFC function, PF>0.96
- ✓ Using ZVS technology to reduce power dissipation
- ✓ Output protection: OVP/OLP/SCP/OPP/OTP
- ✓ Built in Fan speed control
- ✓ Built in AC inrush current limiting circuit(<20A)
- ✓ Build in constant current limiting circuit
- ✓ Built in Remote Sense Function
- ✓ Build in DC OK signal
- ✓ Wide operating ambient temperature (-30℃~70℃)
- ✓ 1 U low profile,41mm
- ✓ 3 years warranty




MODEL		PDF-800-24	PDF-800-48
OUTPUT	DC Output	24V	48V
	Rated Current (100~127Vac)	27A	14A
	Rated Current (128~264Vac)	33A	16.5A
	Ripple and Noise Note 2	≤200mV	≤240mV
	Voltage ADJ. Range	-5%~+10% of rated output voltage	
	Voltage Accuracy	±2%	
	Line Regulation	±0.5%	
	Load Regulation	±2%	
	Set-up Time	≤3S (220Vac input, Full load)	
	Hold up Time	≥8mS (220Vac input, Full load)	
	Temperature Coefficient	±0.03%/℃	
	Overshoot and Undershoot	<5.0%	
	INPUT	Voltage Range	90Vac~264Vac
Frequency Range		47Hz--63Hz	
Power Factor(Typical)		PF≥0.96/230VAC	PF≥0.98/115VAC Full Load
Efficiency (Typical)		≥88%	≥89%
AC Current (max.)		≤12 A	
Inrush Current (Typical)		≤20A @220Vac Cold start	
Leakage Current		Input—output: ≤0.25mA Input—PG: ≤3.5mA	
PROTECTION	Over Load	110%~135% of rated output current, constant current, auto recovery	
	Over power	110%~135% of rated output power, constant current, auto recovery	
	Over Temperature	105℃±5℃(detect on Mosfet temperature);shut down,auto recovery after the temperature goes down to 70℃	
	Over Voltage	110%~150% of rated output voltage, constant voltage, auto recovery	
	Short Circuit	Long-term mode, constant current, auto recovery	
ENVIRONMENT	Operating amb. Temp. & Hum.	-30℃~70℃; 20%~90%RH No condensing (refer to derating curve)	
	Storage Temp. & Hum.	-40℃~85℃; 10%~95%RH No condensing	
SAFETY & EMC (Note 3)	Safety Standards	UL60950-1 2nd Ed; IEC 60950-1:2005(2nd Ed) ;EN60950-1:2006	
	Withstand Voltage	Primary-Secondary:3.0KVac; ≤10mA .Primary-PG:1.5KVac; ≤10mA. Secondary-PG:0.5KVac;≤10mA.	
	Isolation Resistance	≥100M ohms	
	EMI Conduction&Radiation	Compliance to EN55022, Class B	
	Harmonic Current	Compliance to EN61000-3-2,Class D	
	EMS Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11; heavy industry level	
OTHERS	MTBF (MIL-HDBK-217F)	More than 200,000Hrs (25℃, Full load)	
	Dimension (L*W*H)	226x116.5x41mm	
	Packing	6PCS/CTN, 8.9KGS, 0.04CBM	
	Cooling method	Fored air cooling(Built-in fan,the fan speed is controlled by load and internal temp.)	
NOTE	1. All parameters NOT specially mentioned are measured at rated input, rated load and 25℃ of ambient temperature. 2. Measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 uF & 47uF parallel capacitor. 3. The SPS is considered a component which will be installed into final equipment. The equipment must be re-confirmed that it still meets EMC directives.		

④ **Mechanical Specification** Unit:mm

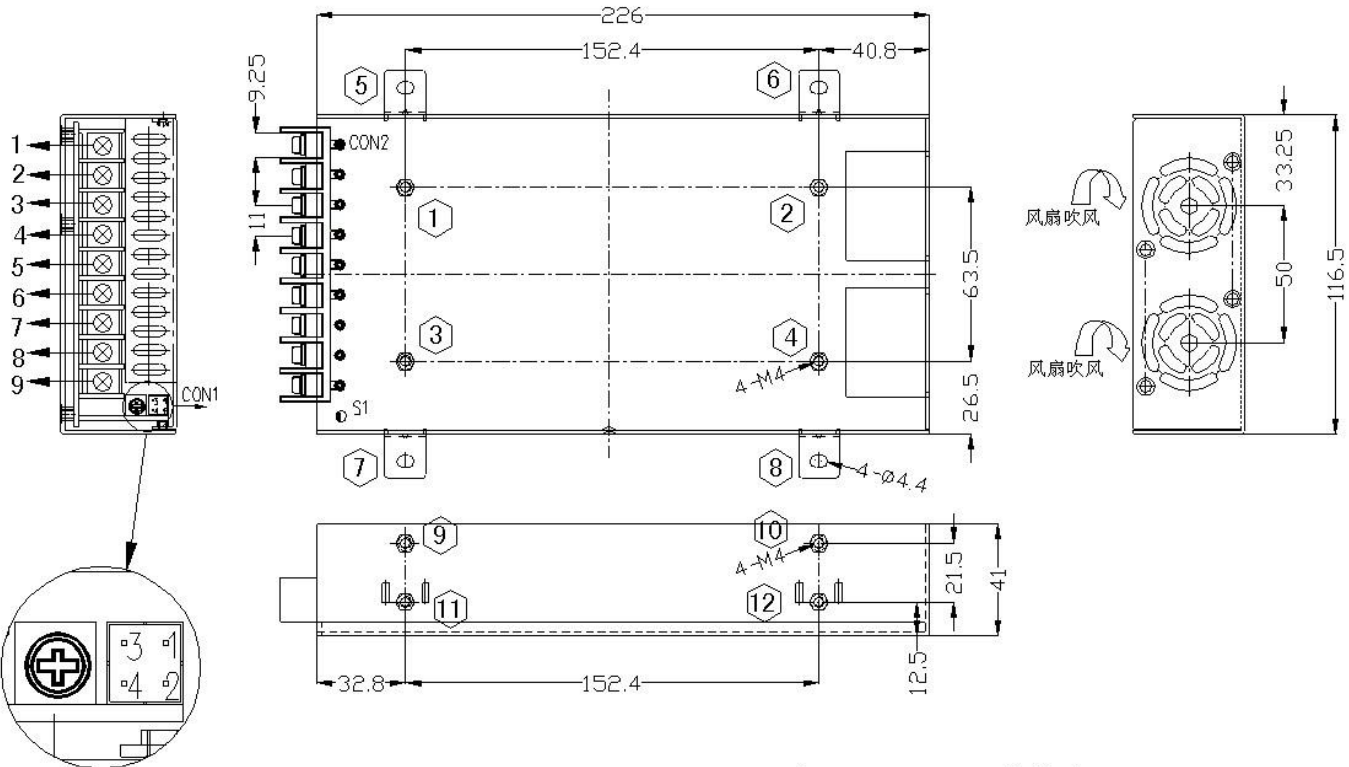

④ **Block Diagram**

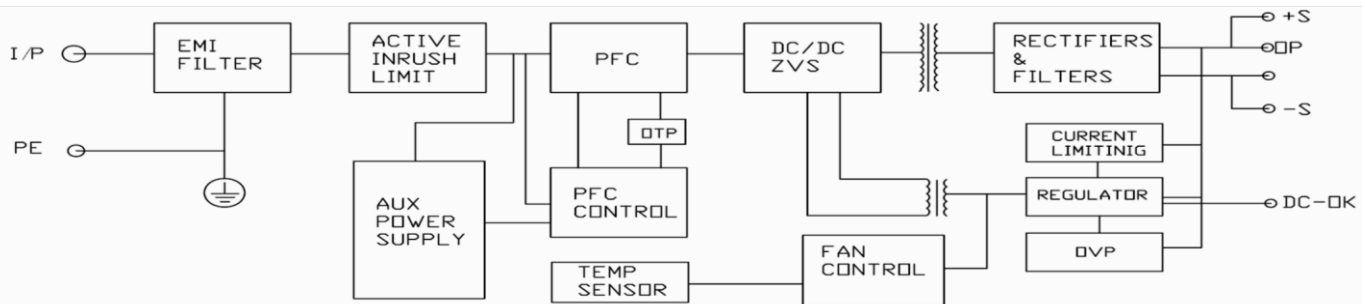

④ **Derating curve**

