

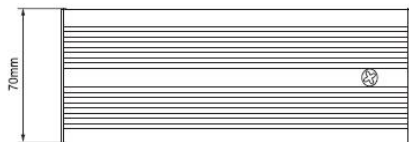



CHCD-600 SPECIFICATIONS

序号 NO.	标称 输出电压 Nominal Output Voltage	充电恒压 (限压) CV	充电恒流 CC	转换/关断 Transition/Cur-Off Current	重量 Net Weight	尺寸 Size
		铅酸 Lead-Acid	(限流) A	铅酸(A) Lead-Acid	(kg)	(mm)
1	12V	14.7V	25	5.0	2.5	240×120×70
2	24V	29.4V	18	3.6		
3	36V	44.1V	12	2.4		
4	48V	58.8V	10	2.0		
特性 Characteristic	1	全自动、浪涌、平充、涓流充、充满自动关断 Full automatic transition of CC,CV and Float/cut-off				
	2	高精度电流电压锁定、确保充满、绝无过充 Precise limit of voltage¤t,guarantee fully charged and avoid charge				
	3	过流、过压、短路保护、安全可靠 Protections:over current,over voltage,short circuit and reverse prolarity				
	4	指示灯显示、全铝外壳、美观坚固、经久耐用 Two LED indicators,aluminium,robust,elegant and reliable				
	5	CE、RoHS				

CHCD-600 EXTERNAL VIEW

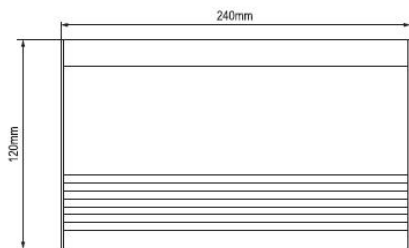

通用
Universal



美国
American



澳大利亚
Australia



英国
UK



法国
French



意大利
Italian



巴西
Brazil



德国
Germany