


LA-Y Series Constant Current LED Driver IP67 PFC (€)



Features

- ◆ Constant current mode
- ◆ Installation: Independent
- ◆ Universal AC input / Full range
- ◆ Protections: Short circuit / Over current

Wire diagram

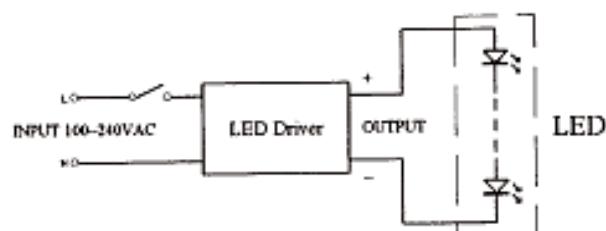

Compliance

- ◆ Magnetic Emission EN55015
- ◆ Harmonic EN61000-3-2
- ◆ Immunity EN61547
- ◆ Safety EN61347-1, EN61347-2-13

MODEL	INPUT	OUTPUT	RATED LOADING	PFC	EFFICIENCY (at full load)	DIMENSION (L*W*H)
LA12Y-350	100-240Vac	9-32Vdc 350mA	3—9 LED	>85%	78%	Φ64*30mm
LA12Y-700	100-240Vac	3-16Vdc 700mA	1—4 LED	>85%	72%	Φ64*30mm
LA20Y-350	100-240Vac	24-48Vdc 350mA	6—13 LED	>90%	82%	Φ78*30mm
LA20Y-700	100-240Vac	15-30Vdc 700mA	3—8 LED	>90%	78%	Φ78*30mm
LA35Y-350	100-240Vac	40-80Vdc 350mA	12—22 LED	>90%	86%	Φ96*32mm
LA35Y-700	100-240Vac	24-48Vdc 700mA	7—13 LED	>90%	86%	Φ96*32mm
LA35Y-1050	100-240Vac	15-30Vdc 1050mA	5—8 LED	>90%	85%	Φ96*32mm
LA35Y-1400	100-240Vac	12-24Vdc 1400mA	4—6 LED	>90%	85%	Φ96*32mm